


# J.L. WINGERT CO.

## Specification Sheet 1-10 GPM ADJUSTABLE FLOW INDICATOR OPTION 08

SS163508.D 03/17

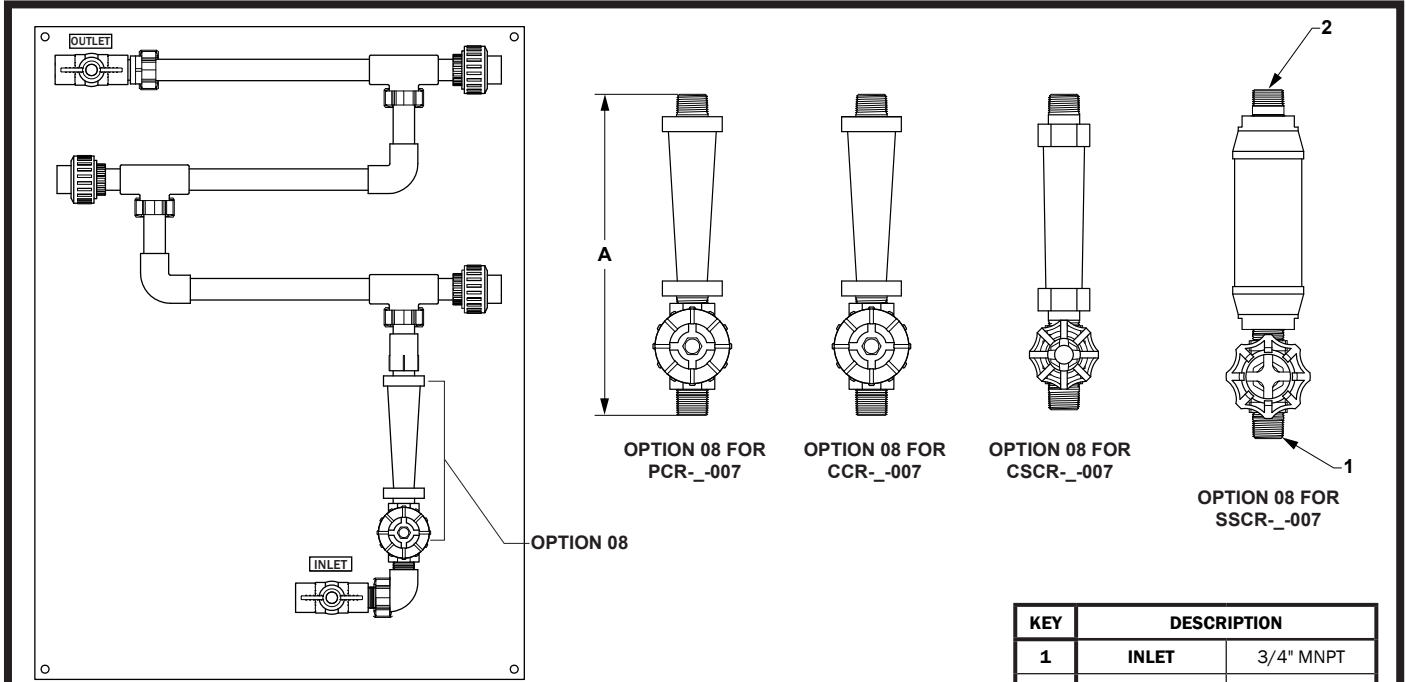

EXAMPLE OF OPTION 08 INSTALLED ON PCR-3-007/08

| KEY | DESCRIPTION |           |
|-----|-------------|-----------|
| 1   | INLET       | 3/4" MNPT |
| 2   | OUTLET      | 3/4" MNPT |

| DIMENSION                   | MODEL NUMBER  |  |   |  |
|-----------------------------|---|--|---|--|
|                             | PCR-007   | CCR-007  | CSCR-007  | SSCR-007   |
| A                           | 10 3/4"   | 10 3/4"  | 10 9/16"  | 11 1/2"  |
| LENGTH ADDER TO COUPON RACK | 9 3/4"  | 9 3/4"   | 6 9/16"   | 6 1/2"   |
| WETTED MATERIALS            | <b>Flow Indicator:</b><br>Body: Polysulfone<br>Guide Rod: 316SS<br>Seals: FKM<br><b>Gate Valve:</b><br>Body: PVC<br>Seals: BUNA-N | <b>Flow Indicator:</b><br>Body: Polysulfone<br>Guide Rod: 316SS<br>Seals: FKM<br><b>Gate Valve:</b><br>Body: CPVC<br>Seals: BUNA-N | <b>Flow Indicator:</b><br>Body: Polysulfone/<br>Brass<br>Spring: 316SS<br>Seals: BUNA-N<br><b>Gate Valve:</b><br>Body: Bronze/Brass<br>Seals: TEFLON® | <b>Flow Indicator:</b><br>Body: PVC/316SS<br>Spring/Rod: 316SS<br>Seals: VITON®<br><b>Gate Valve:</b><br>Body: 316SS<br>Seals: TFE |

| TEMPERATURE<br>(°F / °C) | NON-SHOCK PRESSURE RATING |      |       |      |                   |      |                          |      |
|--------------------------|---------------------------|------|-------|------|-------------------|------|--------------------------|------|
|                          | PVC                       |      | CPVC  |      | Carbon Steel (CS) |      | 316 Stainless Steel (SS) |      |
|                          | PSI                       | BAR  | PSI   | BAR  | PSI               | BAR  | PSI                      | BAR  |
| 73° / 23°                | 150.0                     | 10.4 | 175.0 | 12.1 | 200.0             | 13.8 | 300.0                    | 20.7 |
| 90° / 32°                | 112.5                     | 7.7  | 150.0 | 10.3 | 169.0             | 11.7 | 287.0                    | 19.8 |
| 110° / 43°               | 75.0                      | 5.2  | 125.0 | 8.6  | 138.0             | 9.5  | 273.0                    | 18.8 |
| 130° / 54°               | 45.0                      | 3.1  | 100.0 | 6.9  | 107.0             | 7.4  | 259.0                    | 17.9 |
| 150° / 66°               | N/A                       | N/A  | 76.0  | 5.2  | 76.0              | 5.2  | 244.0                    | 16.8 |
| 200° / 93°               | N/A                       | N/A  | N/A   | N/A  | N/A               | N/A  | 208.0                    | 14.3 |
| 250° / 121°              | N/A                       | N/A  | N/A   | N/A  | N/A               | N/A  | N/A                      | N/A  |

**Note: All dimensions are +/- 1/8". All dimensions are subject to change without notice.  
See Operation & Maintenance Manual for part numbering.**